


Toyota Fortuner 50 (W) (2005-2015)

System	Capacity (l)	Type
Lubrication (w filter)		
2TR-FE (2.7i)	5.6	API SL..SN / ILSAC
1GR-FE (4.0i)	5.5	API SL..SN / ILSAC
1KD-FTV (3.0d)	6.9	API CD..CF-4 / API CF..CF-4, ACEA B1
2KD-FTV (2.5d)	6.9	API CD..CF-4 / API CF..CF-4, ACEA B1
5L-E (3.0d)	7.2	API CD..CF-4

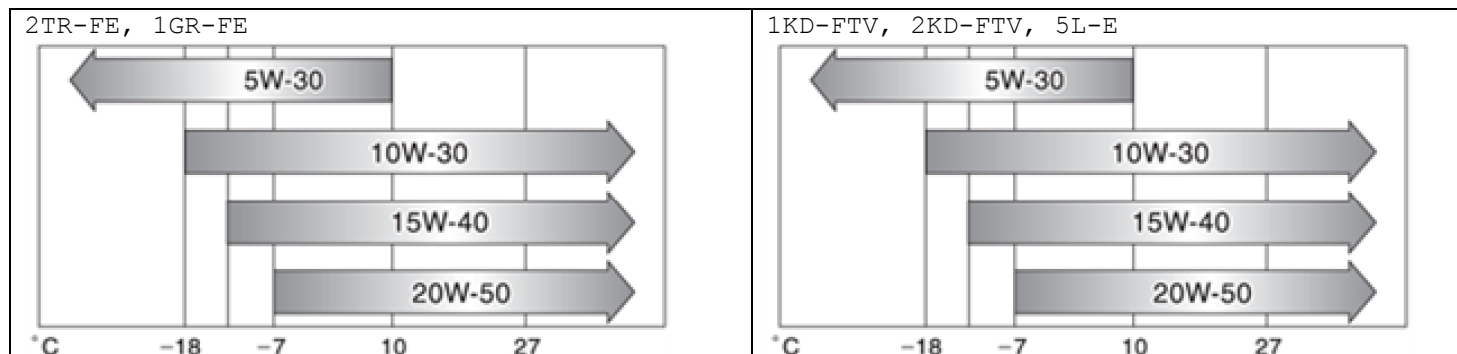

System	Capacity (l)	Type
Cooling		
1GR-FE	9.8 / 8.5	(AT/MT)
2TR-FE	8.1 / 7.8	(AT/MT) w add.heater
	7.3 / 7.8	(AT/MT) w/o add.heater
1KD-FTV	11.1 / 9.8	(AT/MT) w add.heater
	10.3 / 9.0	(AT/MT) w/o add.heater
2KD-FTV	11.1 / 9.8	(AT/MT) w add.heater
	10.3 / 9.0	(AT/MT) w/o add.heater
5L-E	9.4	
Automatic transmission		
4AT	10.1	Toyota ATF Type T-IV
5AT	10.6	Toyota ATF WS
Manual transmission		
4WD	2.2	API GL-4 SAE 75W-90
Pre-Runner	2.6	API GL-4 SAE 75W-90
Transfer		
	1.40	API GL-5 SAE 75W-90
Front differential		
	1.45	Hypoid API GL-5 SAE 80W
Rear differential		
w/o diff.lock	2.45/3.35	Hypoid API GL-5 SAE 80W
w diff.lock	2.90	Hypoid API GL-5 SAE 80W
Power steering		
		ATF Dexron II, III
Fuel tank (RON)		
GR	65/80	Premium (95)
TR	65/80	Regular (91)
KD, L	65/80	Diesel